PRODUCTS

Framery O

Ideal for one - awkward for two



Framery O is ideal for important calls or video conferences. Have your discussions in privacy without disturbing your colleagues. The classic office phone booth delivers leading sound insulation standards and echo-free acoustics, providing a comfortable working environment for one.

Perfect for you

How do you work best? Choose the interior layout that best suits your needs.



For quick calls


If you work best on your feet, choose Framery O without a seat. Perfect for those quick ad-hoc calls and standing work. Installation is fast and the pod is ready to be used the same day it's delivered.



Videoconferences are here to stay

Framery O is also available in the Video Conference Ready variant. A tilting screen bracket and the LED lighting surrounding the screen provide optimal conditions for video-conferences, with the control panel enabling you to adjust the lighting and airflow inside the pod.

Color options

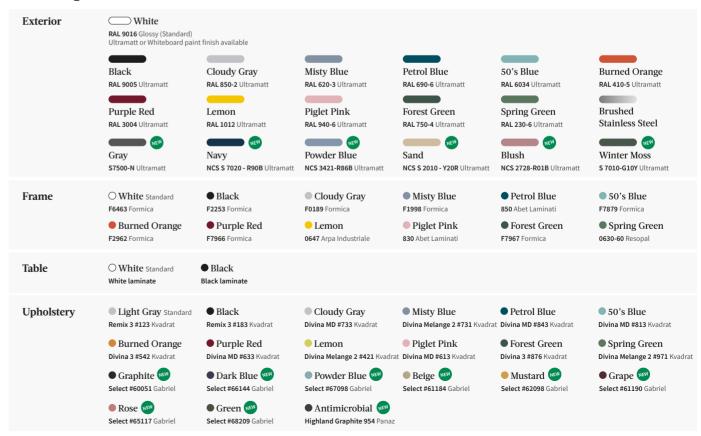

Technical specifications



	Framery O - Video Conference Ready	
Control Panel	Adjust: Brightness of the ceiling light Brightness of LED surrounding the screen Capacity of the airflow	
Screen bracket	Screen specifications: Tilting screen bracket. Maximum display size 24" with flat VESA 100×100 mounting surface. Screen not included	



Regular

13 × 70 × 28,5 cm 5,1 × 27,5 × 11,2 in



Wide 12 × 75 × 30 cm 4,7 × 29,5 × 11,8 in



Framery O options

Standard

- · Frame, exterior and seat colors
- 2 Table options (Regular, Wide)
- Wireless charger (for Wide table)
- · Self-closing hinges
- · Electromechanical code lock
- LAN cable
- · Movability kit

Video Conference Ready

- · Frame, exterior and seat colors
- · Wireless charger
- Self-closing hinges
- · Electromechanical code lock
- LAN cable
- · Movability kit



Optional movability kit

Includes castors and fasteners that can be installed to the bottom of the pod for moving it. Available for Framery O, Q and One.

	Features
Exterior	Painted sheet metal or brushed stainless steel
Glass	Sound control laminated glass
Frame and table	Formica laminate on birch plywood with varnish trim
Solid walls, roof and floor	A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt. An anti-static and stain resistant low loop pile carpet for interior floor.
Weight	320 kg / 705 lb
Airflow	Total airflow is $21.5 \mathrm{l/s} / 77.4 \mathrm{m^3/h}$ (Minimum recommended space for the air to circulate is $5 \mathrm{cm} / 1.9$ " on the sides – $15 \mathrm{cm} / 5.9$ " above the pod.)
Acoustics	Speech level reduction (Ds.A) according to ISO 23351-1 testing method: 30 dB

	Measurements - cm	Measurements - in
Exterior	221 cm × 100 cm × 100 cm (height, width, depth)	87 in \times 40 in \times 40 in (height, width, depth)
Interior	200 cm × 80 cm × 95 cm (height, width, depth)	78 in \times 31,5 in \times 37,4 in (height, width, depth)
Door (left-handed only)	Doorway 84 cm - clear opening width 78,5 cm	Doorway 33 in - clear opening width 30,9 in
Table	Regular: 13 cm × 70 cm × 28,5 cm (height, width, depth) Wide: 12 cm × 75 cm × 30 cm (height, width, depth) Table height from floor: 102,5 cm	Regular: $5.1 \text{ in} \times 27.5 \text{ in} \times 11.2 \text{ in (height, width, depth)}$ Wide: $4.7 \text{ in} \times 29.5 \text{ in} \times 11.8 \text{ in (height, width, depth)}$ Table height from floor: 40 in

Power cord can be led out of the bottom corner of the pod. The cord length outside the pods is 4,5 m / 177 in.

	Framery O - Standard	Framery O - Video Conference Ready	
Power consumption	13 W while in use (Default) LED light: 10 W Fans in total: 3,1 W 0,8 W standby power consumption Fans are working on 25 % of the maximum power Maximum power consumption: 15 W total LED light: 11 W Fans in total: 3,1 W Input: 100-240 VAC, 8.0 A, 50-60 Hz	28 W while in use (Default) LED ceiling light: 10 W - LED wall light: 12,5 W Fans in total: 3,1 W 0,8 W standby power consumption Fans are working on 25 % of the maximum power Maximum power consumption: 40 W total LED ceiling light: 11 W - LED wall light: 25 W Fans in total: 3,1 W Input: 100–240 VAC, 8.0 A, 50–60 Hz	
Outlets	Regular table: Power socket + optional LAN cable (extra cost) Framery O Standard is available with both table options	Wide table: Power socket + USB-A+C + LAN cable (extra cost) Framery O VCR comes with Wide table only	
Output values	Output VAC (power socket): 100–240 VAC, 6,6 A, 50–60 Hz Output USB (TUF) charging: Maximum combined output of 5 A at 5 VDC (25 W)		

All electric components can be changed if there is a malfunction. Power consumption is a constant value that is determined by the power usage of the pods' internal components (electric unit, motion detector, light and fans). Framery's products can be plugged into a wall socket. The pods have their own power supplies that give 24 V DC to the lights and 12 V DC to the fans. The lights and fans are operated by a motion detector. Inside the pods, there are country-specific power outlets for charging mobile devices.